


HT 1.0

640~660W

HY-NT10/78GDF

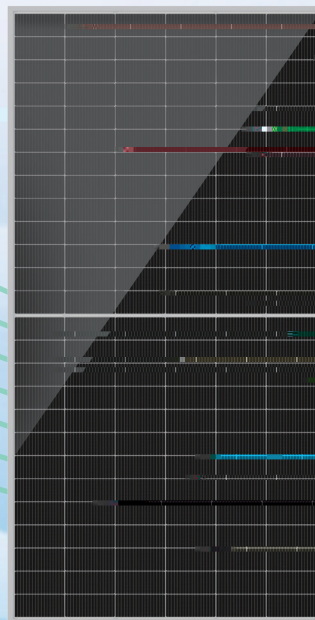

on



LID

PID



23.6




-0.28%/



80±5%

BOS LCOE

- IEC 61215 , IEC 61730
- ISO 9001 2015
- ISO 14001 2015
- ISO 45001 2018

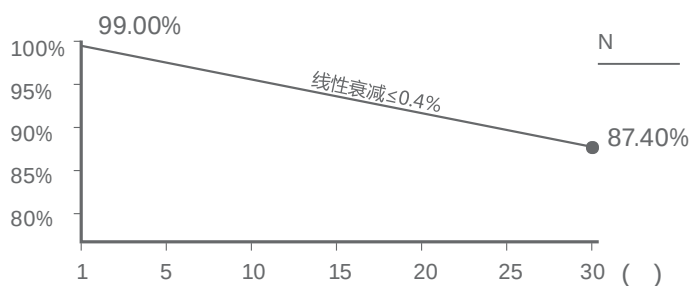

Munich RE



+86 0510-8595 1888

7



info@hysolar.com




https://www.hysolar.com

--	--	--	--	--	--

1000W/m²	25		±1.5		
(Pmax/W)	640	645	650	655	660
(Vmpp/V)	46.95	47.15	47.35	47.55	47.75
(Impp /A)	13.64	13.68	13.73	13.78	13.83
(Voc/V)	56.81	57.01	57.21	57.41	57.61
(Isc /A)	14.21	14.25	14.29	14.33	14.37
	22.9%	23.1%	23.3%	23.4%	23.6%

(Pmax/W)	703.0	708.1	713.9	719.3	725.2
(Vmpp/V)	46.90	47.11	47.31	47.51	47.71
(Impp /A)	14.99	15.03	15.09	15.14	15.20
(Voc/V)	56.76	56.96	57.16	57.36	57.56
(Isc /A)	15.62	15.66	15.70	15.75	15.79

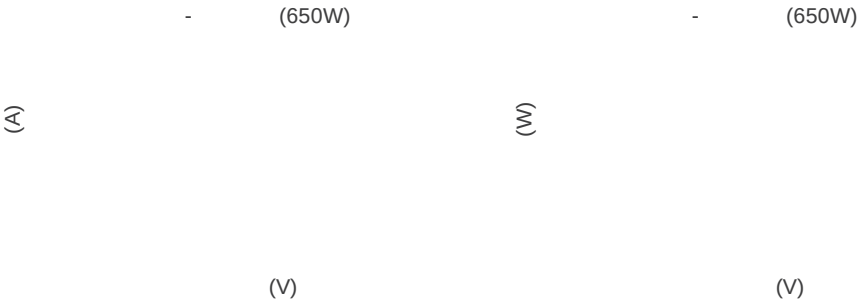


--	--	--	--	--	--

	Pmpp/W	Vmpp/V	Impp/A	Voc/V	Isc/A
5%	683	47.35	14.41	57.21	15.00
15%	748	47.35	15.79	57.21	16.43
25%	813	47.35	17.16	57.21	17.86

(Pmpp)	-0.28%/
(Isc)	+0.043%/
(Voc)	-0.24%/
(NMOT)	42±2°C

(IEC)	1500Vdc
	IP 68
	30A
	-40~+85°C
	80±5%

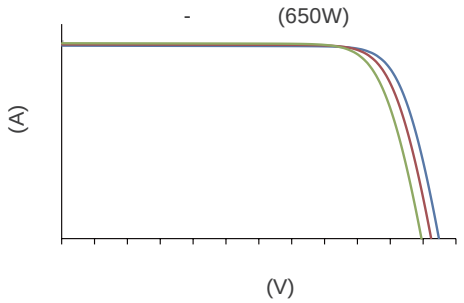

--	--	--	--	--	--

(x x)	2465 x 1134 x 30 mm
N	
	156 (6*26)
	2.0+2.0 mm
	: (+) 300 mm (-) 300 mm
(IEC)	4 mm² / 12 AWG
	5400 Pa () / 2400 Pa ()
(IEC)	PV-HYC11xyz() / MC4 EVO2A()
	34.7 kg
	36 /
	1302 kg
	(17.5m) 864 /